

PYRAMID MASONRY and CHIMNEY LINING COMPANY

The chimney restoration company


Toll Free: 800-232-0405


Local: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave Churchville: VA 24421

METALBEST MODEL ULTRA-TEMP CLASS A

Metalbest Model Ultra-Temp Class A system is ideal for venting residential appliances, burning natural and LP gas, #2 oil, and wood. It's specially designed for today's modern, high efficiency "airtight" wood stoves (solid fuel wood burning fireplaces).



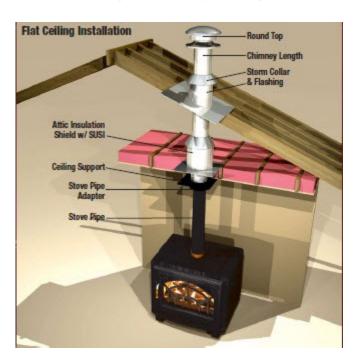



Metalbest has a smooth inner liner that produces rapid stabilization for strong draft and heats fast to minimize condensation as waste gases are exhausted. The outer casing carries structural loads leaving the inner pipe free to expand without stress. Tested to 2100° F, a high temperature test option of Underwriters 'Laboratories safety standard for factory built chimneys, UL-103 sixth edition. Heavy duty stainless steel is used for all system components. This lightweight pipe has threaded internal couplers that lock together with an 1/8 turn.





PYRAMID MASONRY and CHIMNEY LINING COMPANY

The chimney restoration company

Toll Free: 800-232-0405

Flashing (T-AF6) or (T-AF12)

Basement Heater with Tee-supported outside chimney

Round Chimney Top (T-CT)

Chimney

or Less

Storm Collar (T-SC)

Use Locking Bands At Every Joint

Wall Band (T-WB) Needed Every 8'

> Chimney Pipe Adapter (CPA)

> > 0

*The end of the chimney section

must extend into the room a minimum of 4-1/2" beyond the

Finishing Collar (T-FC)


Chimney Extension (T-9) or Longer)*

DSP Stove Pipe

Local: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave Churchville VA 24421

The following diagrams are intended as guides to proper part selection for several common chimney installations.

Wood Stove with chimney offset to avoid ridge

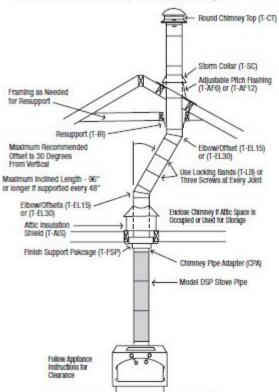


Round Top (T-CT) Storm Collar (T-Sic) Flashing (T-TF) R Chimney Pipe Chimney Pipe Construct a Full Enclosure in Occupied or Habifishle Areas at All Joints Finish Support (T-FSP) Fackage Finish Support (T-FSP) Fackage Finish Support Correct Describe for Correct Describe For all Appliances Fige of Appliances Furnace Furnace Weder Hoder

Combination of Furnace and

Water Heater on one chimney

Wood Heater with its chimney through an upstairs enclosure




Solid Fuel Appliance with a

Wall Thimble

(TWT)

Wall Support Kit (T-WSK) on Outside

Tee Plug






PYRAMID MASONRY and **CHIMNEY LINING COMPANY**

The chimney restoration company


Toll Free: 800-232-0405

Local: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave


A-Frame with chimney on a steep pitch roof



Pitched Roof with Attic



Masonry Fireplace using MetalBest Chimney



All-Fuel Chimney Systems

